

Kcal = Watt x 0.860
 BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.298
 Watt Δt 40° = Watt Δt 50° x 0.727
 Watt Δt 30° = Watt Δt 50° x 0.481
 Watt Δt 20° = Watt Δt 50° x 0.270

p max = 6.5 bar



H cm	L cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°	watt Δt 30°	watt Δt 50°
168.0	28.0	30.0	VU168001_	0.7	117	244	82	171

R = CRSM Brushed chrome / Chrome brossé / Gebürstet Chrome / Cromo cepillado
G = GLSM Brushed gold / Doré brossé / Gebürstet Gold / Oro cepillado

Optional

 (P* = 202)	 (P* = 202)		 (I* = 5 cm)	
Angled Valve Vanne équerre Eckausführung Ventil Válvula a escuadra	Angled valve 5 cm pipe centre Vanne équerre entraxe 5 cm Ventil für 5 cm Mittelanschluss Válvula a escuadra 5 cm	Thermostatic head Tête thermostatique Thermostatkopf Cabezal termostático	Sleeving kit Kit couvre tuyau Rosetten Kit cubre tubo	$\varnothing \leq 16$ mm [BIAN] CTB [CROM] CTR
[BIAN] E12SQB [CROM] E12SQR	[BIAN] E12SQ5B [CROM] E12SQ5R	[BIAN] VTTB [CROM] VTRR	[BIAN] C5B [CROM] C5R	16 mm < \varnothing < 24 mm [BIAN] CWB [CROM] CWR

art* = item / modèle / Artikel / artículo **I*** = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
Lt* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento
P* = page / page / Seite / página

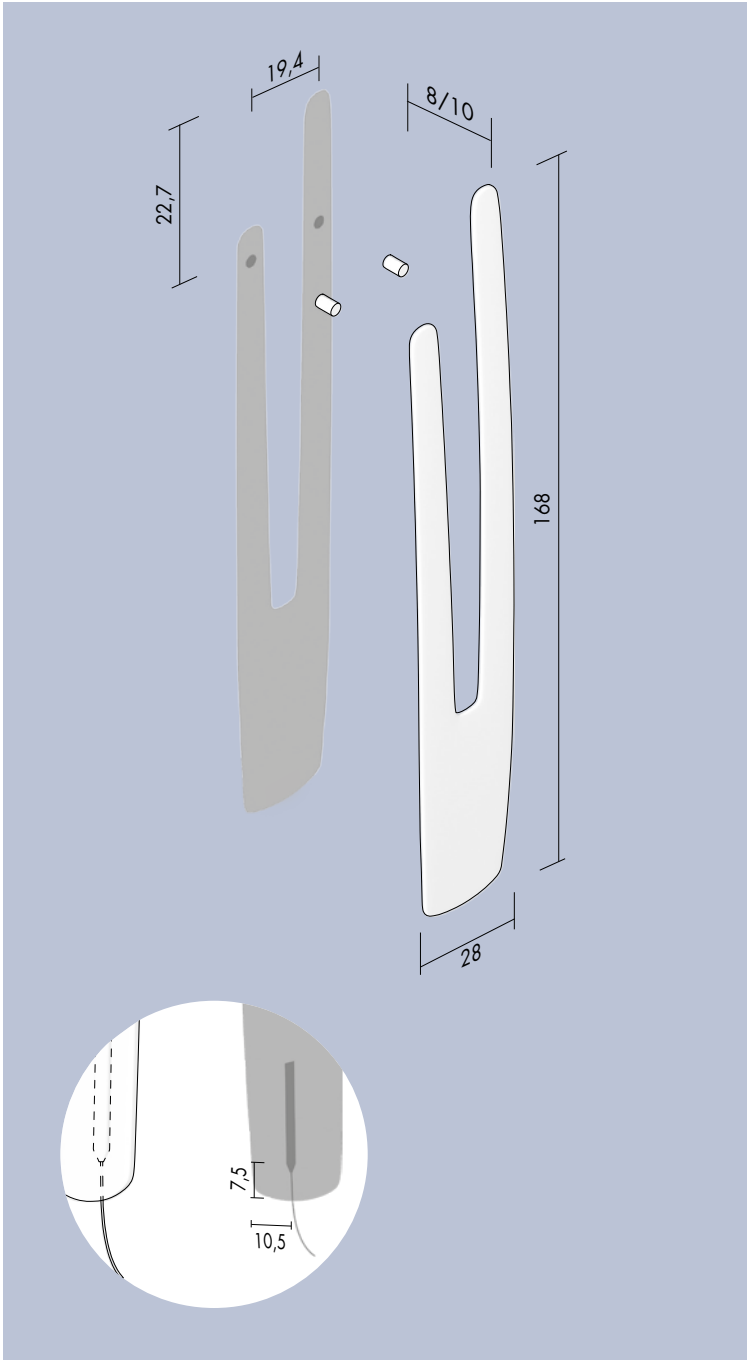

H cm	L cm	art*	watt	watt
168.0	28.0	EC VU168001	300	300

R = CRSM Brushed chrome / Chrome brossé / Gebürstet Chrome / Cromo cepillado
G = GLSM Brushed gold / Doré brossé / Gebürstet Gold / Oro cepillado

Optional



Receiver
Récepteur
Empfänger
Receptor

R10



Digital chronothermostat
Chronothermostat digital
Der digital Chronothermostat
Cronotermostato digital

T10

art* = item / modèle / Artikel / artículo